




Coding ZT07/ZTWB Remote Control 433MHz Hand Transmitters

Steel-Line SD800 Sectional Garage Door Opener*

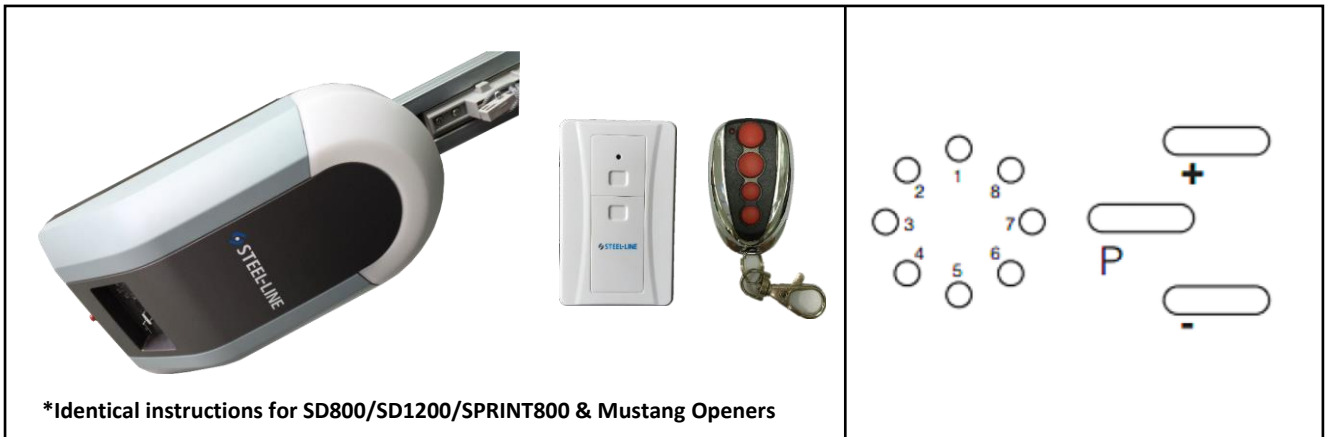

1. Additional transmitters can be coded as follows:

- ❖ Press and hold the “P” and “+” buttons until all lights turn on and LED 7 flashes.
- ❖ Press the “+” button once (*all LED lights turn off except LED 7*).
- ❖ Quickly press and release the required push button on your remote twice (*all LED lights turn on and LED 7 will begin flashing*).
- ❖ Press the “P” button once to save (*LED 3 will switch on indicating that the remote has been successfully programmed*).

Repeat above procedure for all additional handsets. same

Note: A maximum of 6 codes can be learned by the opener. If you attempt to code more than 6 transmitters the oldest code will be deleted.

2. Deleting transmitters:

Note: This procedure will clear all programmed remotes, wireless wall buttons and wireless keypads from the opener.

- ❖ Press and hold the “P” and “+” buttons until all lights turn on and LED 7 flashes.
- ❖ Press and hold the “-” button until LED 7 turns off and begins flashing again.
- ❖ Press the “P” button once to save (*LED 3 will switch on indicating that all codes have been deleted and that the opener is now in normal operating mode*).

Follow procedure 1. above to code new remote control hand transmitters.